

CYN | Pendant Ambient Luminaire

Overview

A series of precision-engineered architectural cylinders, available in 2.5", 4", and 6" diameters. Surface, pendant, and adjustable surface mount configurations deliver clean visual impact with optical precision – designed to complement the geometric Horizon Array family.

Part #:

CYN | Pendant Cylinder

Lumens:

800 Lm (8 W)
1,100 Lm (11 W)
1,500 Lm (15 W)

Color:

CCT: (Standard)	CCT: (Dim to Warm)	CRI:	Voltage:
2700K	1800K - 3000K	90	Standard:
3000K			120-277 V
3500K			
4000K			
5000K			
Dim to Warm (1800K-3000K)			

Voltage:

Standard:
120-277V

Dimming:

0-10V, Dim to 1% (Flicker Free)
TRIAC (Flicker Free)
ELV (Flicker Free)
Dim to Warm (Flicker Free)

Lifetime:

Standard:
L80 > 50,000 Hrs.

Operating Temperature:

Standard:
-4°F - 104°F

Finishes:

Phantom black Wispy white Specter silver grey

Custom color available*

*All custom color requests must be call to order and will affect leadtimes.
Accommodation for RAL color code is available.



CYN25

Suspended Mount - 2.5"


Features:

Your style, your way
Choose from numerous mounting options and styles to suit your needs.

Bend the light to your whims


Three In One dimming driver allows for 0-10V, TRIAC, and ELV dimming.
Adjustable optics allows for 18°, 24°, 36°, and 50° beam angles.

Aluminum housing and performance light engine
High quality, precision housing paired with a long lasting light engine.

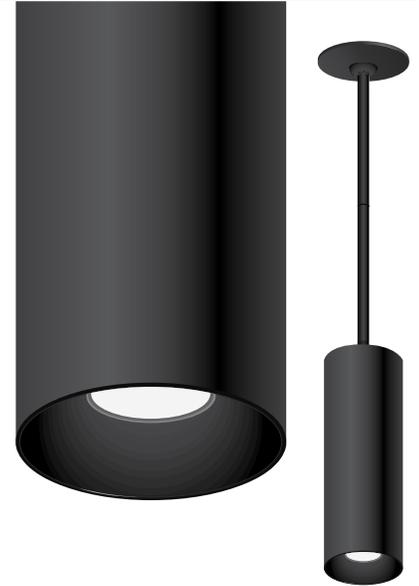


Trim:


Standard:



Standard Vortex Baffle




Cross Baffle




Wall Wash Baffle

Lens:


Standard



Soft Lens




Linear Spread




Hex Louver

Wall Wash



Single Side Wall Wash



Double Sided Wall Wash

Optics:

Photometry:



18° Flood



24° Flood



36° Flood



36° Flood




36° Flood




50° Flood

Also available in:



Surface Mount



Adjustable
Surface Mount

Type:	Project:	Submitted by:	Date:
Ordering information:			

CYN | Pendant Ambient Luminaire

Example: CYN 25R WS15 15W SD18 VB 950K

Ordering Guide:

Use the buttons below to build out a product number.

Body and model		Output / CCT / Electrical					
Series	Size	Power <small>Universal dimming (0-10V, TRIAC, and ELV)</small>	Power <small>Dim to warm (1800K - 3000K)</small>	Distribution	Baffle ¹	CCT/CRI	Voltage
CYN <small>Cyn - Suspended Cylinder</small>	25R <small>2.5" Diameter</small>	WS15 8W <small>800 Lumens / 58W</small>	WX15 <small>1,200 Lumens / 15W</small>	SD 18 <small>Very Narrow - 18°</small>	VB <small>Standard Vortex baffle</small> CB <small>Cross baffle</small> WWSF <small>Wall wash, Metallic silver finish</small> <small>¹ Baffle color finish will match fixture color (see Fixture Finish) unless otherwise specified.</small>	927K <small>90 CRI - 2700K</small>	BLANK <small>120-277V</small>
		WS15 11W <small>1,100 Lumens / 11W</small>		SD 24 <small>Narrow - 24°</small>		930K <small>90 CRI - 3000K</small>	
		WS15 15W <small>1,500 Lumens / 15W</small>		SD 36 <small>Medium Narrow - 36°</small> SD 50 <small>Wide - 50°</small>		935K <small>90 CRI - 3500K</small> 940K <small>90 CRI - 4000K</small> 950K <small>90 CRI - 5000K</small> 9DWK <small>90 CRI - Dim to warm 1800K - 3000K</small>	

Finish	Hard Optics	Mounting		Battery Backup
Fixture Finish ²	Lens	Cable Pendant ³	Stem Pendant ⁴	Emergency Backup
BK <small>Phantom black</small> WH <small>Wispy white</small> SG <small>Specter silver grey</small> -----* <small>RAL color code</small>	BLANK <small>Standard clear lens</small> HEX <small>Hex louver</small> SFT <small>Softening lens</small> LIN <small>Linear spread</small> SWW <small>Single side wall wash</small> DWW <small>Double side wall wash</small>	CPBK <small>Cable Pendant mount kit, Black finish (specify length).</small> CPSG <small>Cable Pendant mount kit, Silver Gray finish (specify length).</small> CPWH <small>Cable Pendant mount kit, White finish (specify length).</small> <small>³Please specify length to the FT.</small>	SPBK <small>Stem Pendant Mount, Black Finish (specify length).</small> SPSG <small>Stem Pendant Mount, Silver Gray Finish (specify length).</small> SPWH <small>Stem Pendant Mount, White Finish (specify length).</small> <small>⁴Please specify length to the FT.</small>	BLANK <small>No Emergency Backup</small> EMD-RH08D-UNV-170-BK <small>Emergency Battery backup (8W), Black Finish</small> EMD-RH08D-UNV-170-WH <small>Emergency Battery backup (8W), White Finish</small> EMD-RH08D-UNV-170-SG <small>Emergency Battery backup (8W), Silver Gray Finish</small>

² Power cable, stems, and mounting kits will match cylinder finish.


*Custom color requires MOQ and advanced leadtimes.

CYN | Pendant Ambient Luminaire

Performance Data:

Power	Size	2700K (90 CRI)		3000K (90 CRI)		3500K (90 CRI)		4000K (90 CRI)		5000K (90 CRI)	
		Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
15W	2.5 IN	1,430 LM	95 LM/W	1,430 LM	95 LM/W	1,430 LM	95 LM/W	1,500 LM	100 LM/W	1,500 LM	100 LM/W

Dimensions:

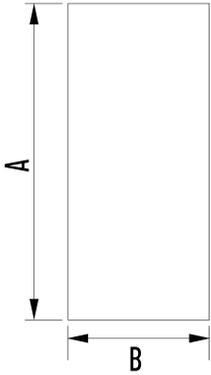

Size	Height (A)	Width (B)
2.5 IN ROUND	8.3 IN	2.87 IN

Mounting:

